



Models

Colour Temperature

Ref:

☐ Daylight 5000K - 5500K

4142-9532



Technical Details


Power:	50 W
Voltage:	220-240V AC
Multi-Voltage:	210-260V AC
Frequency:	50-60 Hz
Dimmable:	TRIAC
Points of Light:	1
Light Source:	LUMILEDS 3030
CRI:	80
Lumens:	6000 lm
LED Performance:	120 lm/W
Energy Efficiency 2021 (UE-1369/2017):	A+
Energy Efficiency 2023 (UE-2019/2015):	D
Use:	Indoor, Outdoor

IP Protection:	IP54
IK Protection:	IK07
UGR (Glare Rating):	UGR 15
Material:	Slate, Fibreglass
Installation:	Pendant
Size:	620xØ582 mm
Height:	620 mm
Diameter:	Ø582 mm
Working Temperature:	-10°C ~ +40°C
Life Span:	40,000 Hours
Warranty:	3 Years
Certifications:	CE & RoHS, UKCA




Ambience

Measures

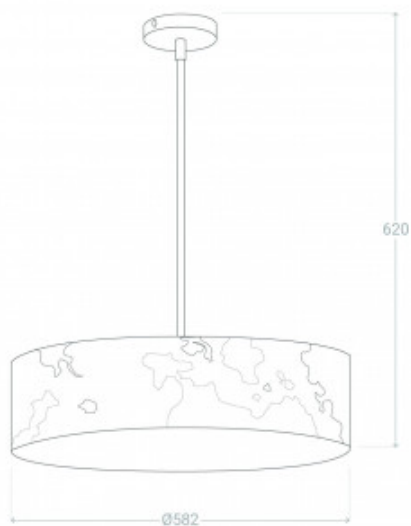

/mm.

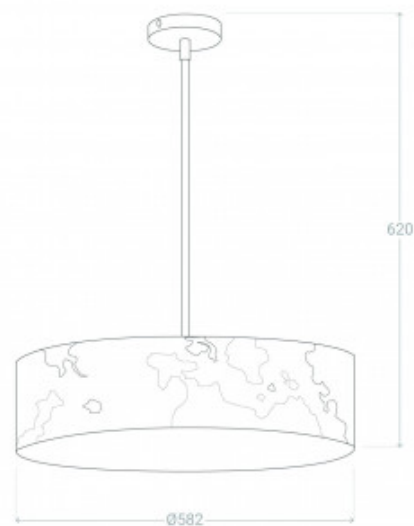

/mm.




Description

If we're looking for a lighting element that will stand out, this is without a doubt our best option as, with a peculiar design, there's no way this Ercle pendant light will go unnoticed, no matter the environment in which it's installed. **It's made from natural slate with an interior fibreglass and polyester cover.**

It has a 1-100% dimmable output which allows us to adjust the brightness in relation to our immediate needs. **This Pendant Light** is used in all sorts of designer spaces where we're looking for lighting that conveys personality and helps it stand out. Hotels, expositions, businesses, offices,... and even in dining and living rooms.



Additional photographs

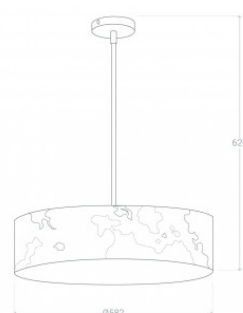

/mm.