



Ref:

65376-130655

65376-130656

65376-130655

65376-130699

65376-130700


65376-130656

65376-130699

65376-130700

65376-130703

65376-130703

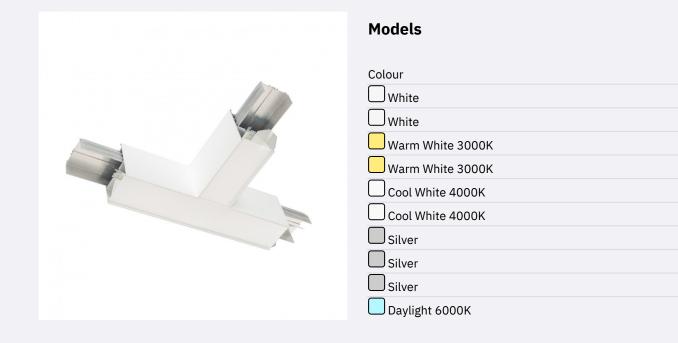

## **Technical Details**

Power:	12 W
Voltage:	220-240V AC
Frequency:	50-60 Hz
Protection Class:	I
CRI:	80
Lumens:	1200 lm
Luminous Efficiency:	100 lm/W
Energy Efficiency 2023 (UE- 2019/2015):	F
<u> </u>	F 120°
2019/2015):	·
2019/2015): Beam Angle:	120°
2019/2015): Beam Angle: Use:	120° Indoor
2019/2015): Beam Angle: Use: IP Protection:	120° Indoor IP20

Material:	Aluminium
Installation:	Surface
Size:	80x190x320 mm
Height:	80 mm
Width:	190 mm
Length:	320 mm
Cable Length	1000 mm
Total Weight:	0.94 kg
Working Temperature:	-20°C ~ +40°C
Driver:	AGT
Life Span:	40,000 Hours
Warranty:	5 Years
Certifications:	CE & RoHS, TÜV, ENEC





## **Description**

The 12W New Turner LED Linear Bar "T" is ideal for connecting three 40W New Turner LED Linear Bars at a 90° angle to create a larger continuous structure. It is perfect to give a professional touch to your offices, work areas, home, shops ... giving an ideal lighting offering a uniform illumination and reducing visual disturbances.

Characteristics of the 12W New Turner LED Linear Bar "T" (UGR19)

The great potential of the New Turner luminaire lies in the fact that up to 10 New Turner bars can be joined in series or combined with the L, T and X joints to build the shape that best suits your project.

With the New Turner LED Linear Bar you can create your own customised light structure, decorate and illuminate any room.





## Additional photographs

