



## Models

Colour Temperature		Ref:
<input checked="" type="checkbox"/>	Warm White 3000K	474-1077
<input type="checkbox"/>	Cool White 4000K	474-1078

## Technical Details



<b>Power:</b>	1.5 W
<b>Voltage:</b>	220-240V AC
<b>Frequency:</b>	50-60 Hz
<b>Protection Class:</b>	II
<b>Points of Light:</b>	1
<b>Light Source:</b>	COB
<b>Number of LEDs:</b>	1
<b>Lumens:</b>	165 lm
<b>Luminous Efficiency:</b>	110 lm/W
<b>Energy Efficiency 2023 (UE-2019/2015):</b>	F
<b>Beam Angle:</b>	120°
<b>Use:</b>	Indoor
<b>IP Protection:</b>	IP20
<b>Material:</b>	ABS

<b>Installation:</b>	Recessed
<b>Size:</b>	94x94x50 mm
<b>Cut-Out</b>	75x75x45 mm
<b>Height:</b>	94 mm
<b>Width:</b>	94 mm
<b>Length:</b>	50 mm
<b>Total Weight:</b>	0.13 kg
<b>Detector:</b>	PIR
<b>Detection Distance:</b>	1~1.5 m
<b>Detection Angle:</b>	120°
<b>Working Temperature:</b>	-20°C ~ +40°C
<b>Life Span:</b>	40,000 Hours
<b>Warranty:</b>	3 Years
<b>Certifications:</b>	CE & RoHS, UKCA



## Ambience

## Measures

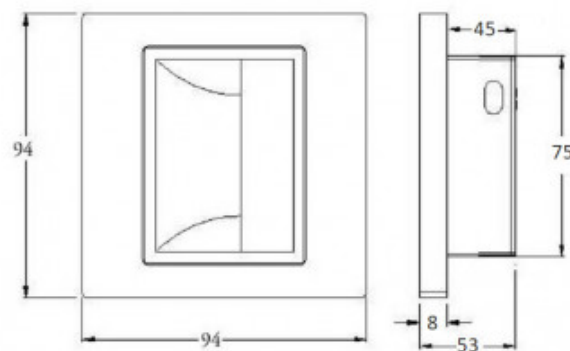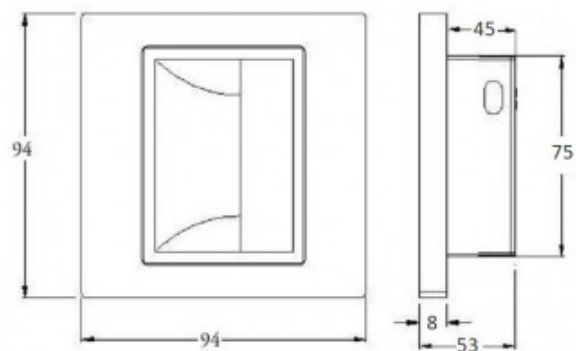



## ***Description***

**The 1.5W Bark Recessed Wall LED Spotlight with PIR Sensor in Black** is made of high quality, fire resistant ABS material and has a modern and elegant design. **It is fitted with a 1.5W COB LED, which offers 165 lumens and an even, well-distributed,** soft, eye-friendly white light. The driver is included inside. The beacon remains switched off until its infrared sensor detects movement within the range (1-1.5 m and 120° angle), 60 seconds after the last movement is detected, it switches off again. All of this allows it to extend its service life, as well as providing greater savings in consumption. **Its use is extensive and varied, perfect for spaces such as staircases, corridors, lift entrances, car parks, hotels, etc.**



## ***Additional photographs***

